
MDINC3 Ethernet Network Card

Features

- Support 4x RJ45 network ports
- Support Intel 210AT network chips
- Support PCIe x2 bus
- Support POE
- 10/100/1000Mpbs link rate adaptive network
- Full height block is standard, half height block is optional
- Support IEEE-1588 and IEEE-8023.at

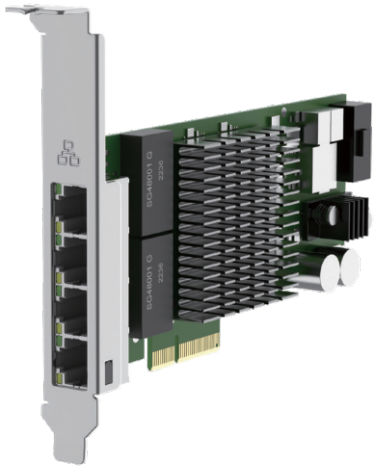

Product specification

System	
Port type	4x RJ45
Network chip	Intel® I210-AT
Bus interface	PCIe x4 compatible with x8/x16(x2 signal) 1 x DDR3L 1333 MHz SDRAM Slot, up to 8GB
speed	10/100/1000Mpbs
Meet the requirements	IEEE802.3,IEEE802.3u,IEEE802.3ab,IEEE802.3x,IEEE802.3af
Single PoE power supply	The maximum power consumption per port is 30W(auxiliary power supply) and 15.4w for PCIe power supply
LED indicator	"Speed LED Steady on: 10M: off 100M: orange 1000M: green; LinkLED: Blinking green with data transmission, steady green without transmission"
Operating system	Win7/Win10，Linux
Environment	
Operating temperature	0℃ ~ 60℃
Storage temperature	-40℃ ~ 85℃
humidness	Operation hum: 5% to 90%, non-coagulation non Storage humidity Storage hum: 5%~95%, non-coagulation non
Power source	
Power input	Power is supplied directly through a PCIe slot or 12V external power supply
Institution	
Dimension	149*68.9mm
Authentication	
Safety certification	CE, FCC

Industrial Computer

network card	MDINC-G02L-I210 2-port PCIE network port	2 Ethernet ports - PCIE Ethernet port
	MDINC-G04L-I210 4-port PCIE network port	4-ports PCIE port
	MDINC-G4PL-I210 4-port POE Ethernet port	4-ports POE network card
	MDINC -X550 2-port 10 Gigabit Ethernet card	2-ports 10 Gigabit Ethernet card
Touch screen integrated machine	MDINC-PD156	15.6-inch CPU: J6412/Memory: 8G/Storage: 128G/2LAN
	MDINC-PD156	15.6-inch/CPU: I5-10310U/Memory: 16G/Storage: 1TB SSD/2LAN
	MDINC-PD190	19 inch/CPU: J6412/Memory: 8G/Storage: 128G/2LAN
	MDINC-D190	19 inch/CPU: I5-10310U/Memory: 16G/Storage: 1TB SSD/2LAN



Address: 7191 Yonge street, Toronto, Canada

Tel: +16472221281(5 line)

Web: www.madecotech.com

Email: Info@madecotech.com